


## FIBERGLASS MOLDED GRATINGS





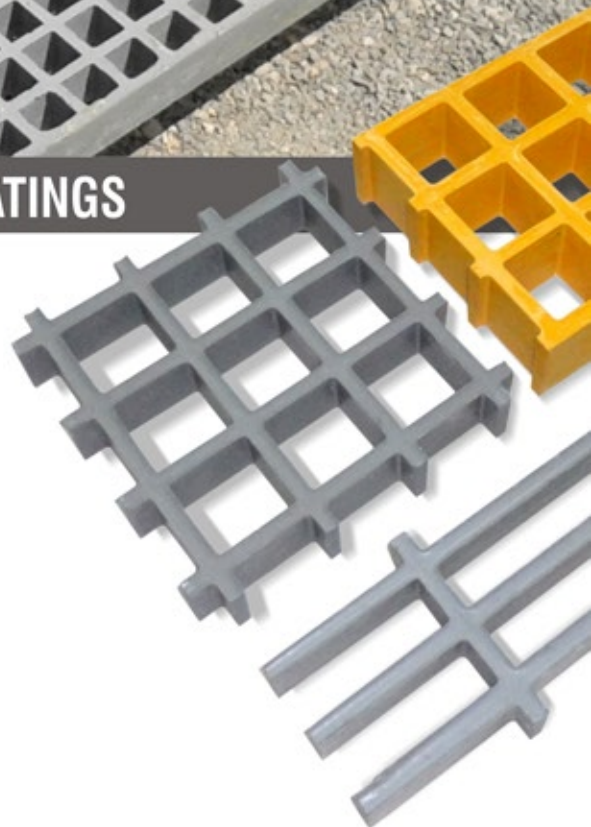

## FIBERGLASS GRATING SYSTEMS

A well designed Composite system like **AERON** Composite gratings is needed for flooring, walkway and decking areas in corrosive environment for superior load bearing and corrosion resistance.

This can be achieved with the use of good quality grade resins With UV inhibitors and other additives with sufficient glass fibre reinforcement.

**AERON** offers Molded as well as Pultruded composite gratings:

### Molded Grating :

- » Installation around piping, tanks and other obstacles is much simpler with molded grating.
- » Fixed panels sizes to be fitted on site.
- » The chemical resistance of molded grating is superior.
- » Well suited for forklift traffic.
- » Designed for a max deflection of SPAN/100.

### Pultruded Grating :

- » Used where mechanical load is very high or support distances are very wide.
- » Panels are fabricated to drawing with minimum wastage.
- » Performs structurally better than molded grating with a maximum deflection to be limited to SPAN / 200 (the same limit as for steel grating).

### Features & Benefits :

- » Corrosion & Chemical Resistance
- » Slip & Impact Resistant
- » Maintenance Free
- » Fire Retardant
- » High Strength - to - Weight Ratio
- » Electrically & Thermally Non Conductive
- » Easy Fabrication & Low Installation Cost
- » Long Service Life
- » Good Load Bearing Capability
- » UV Resistant
- » Superior Ergonomics & Aesthetic






# FIBERGLASS MOLDED GRATINGS

Aeron is one of the India's leading producers of molded grating. Renowned for their high strength, corrosion resistance in the harshest environments, long life and safety. Molded Gratings meet the highest international standards. Produced from carefully selected resin systems, Aeron Grating is designed to deliver many years of reliable service, outperforming the traditional materials they replace.

Aeron Fiberglass Gratings are lightweight, easy to fabricate and install. Their acceptance in many major industries has made them the first choice over steel, not only for their performance but cost competitiveness. Comparable with steel at the installed cost stage, their low maintenance and long life means a significantly lower life cycle cost than that of steel.

Fiberglass Molded Gratings are available with Polyester, vinyl ester or phenolic resin. All kinds of resin are self-extinguishing and UV-stabilized.

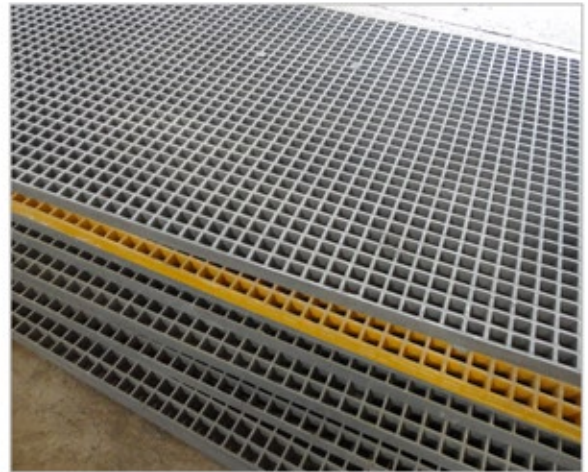

## Applications

- » Walkways
- » Platforms
- » Trench covers
- » Staircase
- » Floorings
- » Foot Bridges
- » Step Treads
- » Swimming pool overflow
- » Fencing
- » Elevated car parking
- » Earth pit covers
- » Etc....

## Industry

- » Chemical
- » Marine
- » Oil & Gas
- » Power
- » Food & Beverage
- » Desalination
- » Cements
- » Constructions
- » Pharmaceuticals
- » Pulp & Paper
- » Recreation
- » Water & Waste Treatment
- » Railways
- » Shipping
- » Transportation
- » Architectural
- » Telecommunications
- & Many more


## Size

Fiberglass Molded Grating are made into various mesh patterns and surface suitable for demanding applications.

Product Code	Height (MM)	Mesh Size (MM)	Rib Thickness (MM)	Open Area (%)	Sheet Size (MM)
SM 12 x (50 x 50)	12.5	50 x 50	6-5	82	1007 x 2007, 1007 x 4047
SM 25 x (38 x 38)	25	38 x 38	7-5	69	1220 x 3660
RM 25 x (25 x 100)	25	25 x 100	6.35	68	1220 x 3660
SM 30 x (38 x 38)	30	38 x 38	7-5	68	1007 x 2007, 1007 x 4047
SM 38 x (38 x 38)	38	38 x 38	7-5	68	1220 x 3660, 1007 x 2007, 1007 x 4047
SM 50 x (50 x 50)	50	50 x 50	8-5	71	1220 x 3660
MM 30 x (20 x 20)	30	20 x 20 (Mini)	7-5	42	2003 x 740

# When Panel Size 1007 X 4047 Or 1007 X 2007, Mesh Size Will Be 40 X 40


## Fiberglass Molded Gratings



SM-Square Mesh



RM-Rectangle Mesh

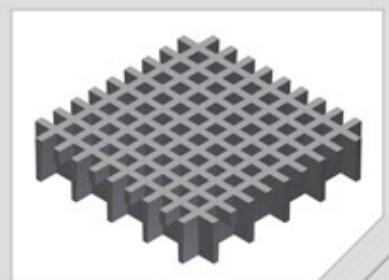

MM-Mini Mesh

## Surface


To Provide safest walking surface Aeron Fiberglass Gratings are available in three anti-slip surfaces.



Concave Top : Suitable for wet & oily conditions



Inbuilt Grit : A quartz grit finish applied in the mould during manufacture.



Applied Grit : A quartz grit sealed with a tough, long wearing epoxy coat.



Chequered Plate / Grit Top

## Aeron's Resin Selection Systems

### Resin Selection

The first step to ensure maintenance - free flooring solution is Aeron Grating. Having an appropriate resin makes highest performance in the most demanding circumstances. Aeron Gratings are available in five standard resin grades which are highly economical while they maintain high standards of performance.

### Aeron Resin Grades

Resin Type	Resin Base	Description	Flame spread rating ASTM E84
Type V	Vinyl Ester	Superior Corrosion Resistance & Fire Retardant	Class1, 25 or less
Type IFR	Isophthalic Polyester	Industrial Grade Corrosion resistance & fire retardant	Class 1, 25 or less
Type I	Isophthalic Polyester	Industrial Grade Corrosion resistance in acidic environment	Non fire retardant
Type P	Phenolic	Low smoke and superior Fire Resistance	Class 1, 5 or less

## Comparison with conventional materials

PARAMETERS	FIBERGLASS GRATINGS	HOT DIPPED GI	SS
Life Span	High	Moderate	High
Strength To Weight Ratio	High	Low	Low
Life Cycle Cost	Low	High	High
Corrosion Resistivity	Very High	Moderate	High
Chemical Resistivity	Very High	Moderate	High
Electrical Conductivity	Nil	High	High
EMI / RFI Transparency	High	Nil	Nil
Installation Cost	Low	Moderate	Moderate
Handling	Very Easy	Difficult	Difficult
Anti Skid	Available	NA	NA
Colour Range	Available	NA	NA

## Construction

Fiberglass Molded Gratings are produced by wet moulding and hot curing in a heated mould. The reinforcement consists of continuous fibreglassroving in alternating layers, so the loads are distributed evenly in all directions. Regularly Molded Fiberglass Gratings have a polyester resin matrix. Glass content is approximately 35%. Standard colours are green, yellow or grey, other colours are available according to RAL.



# FITTINGS



## Accessories:

Applicable for our gratings we have special support angles which are concreted into the basement directly.



### Fixing Sets

**Easy to assemble without any special tools. A pultruded Fiberglass angle can be used as a frame for all Fiberglass gratings.**


Stainless steel fixing sets can be used for all standard Fiberglass gratings and support constructions. To prevent Fiberglass gratings perfectly against lifting and sliding away each panel should be fixed on at least four points.

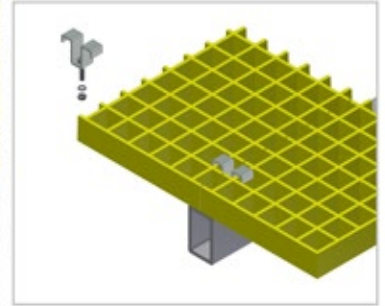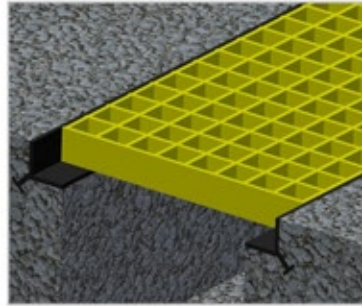


### M-CLIP

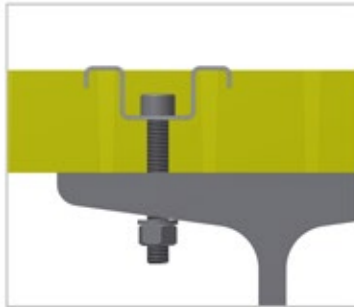

### C-CLAMP

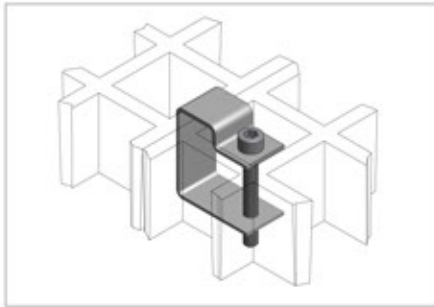


### Double clamp

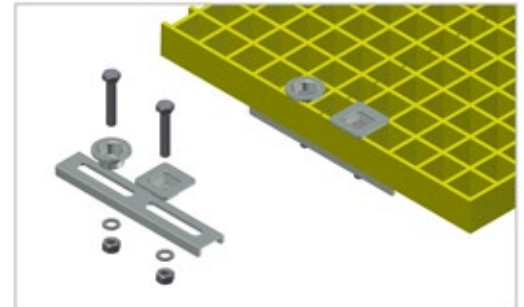

## Color Selection

To complement any design project, Aeron Grating offers a wide selection of colors to choose from. Standard colors available for fiberglass grating: Dark Grey, Yellow and Green. Custom colors may be available upon request.





**Fiberglass  
Cable Tray**



**Fiberglass  
Structural Profiles**



**Fiberglass  
Ladder**



**Trefoil Clamp**



**Fiberglass  
Handrails**




**Fiberglass  
Pultruded Gratings**



**Fiberglass  
Canopy**



**Fiberglass  
Fencing**



**Fiberglass  
Molded Gratings**



**Fiberglass  
Poles & Mast**



### **AERON COMPOSITE PVT. LTD.**

Reg. Off.: Block No. 496/P, Tajpur Road, Sarkhej Bawala Highway,  
Changodar – 382213 Tal. Sanand, Ahmedabad, Gujarat – INDIA.

T : +91-79-6525 8500 | F : +91-79-26561238 | M : +91-99099 88266

E : [info@aeroncomposite.com](mailto:info@aeroncomposite.com) | W : [www.aeroncomposite.com](http://www.aeroncomposite.com)

